


SOUNDING Double Ni

Full-scenario oil and smoke resolution solution



95%

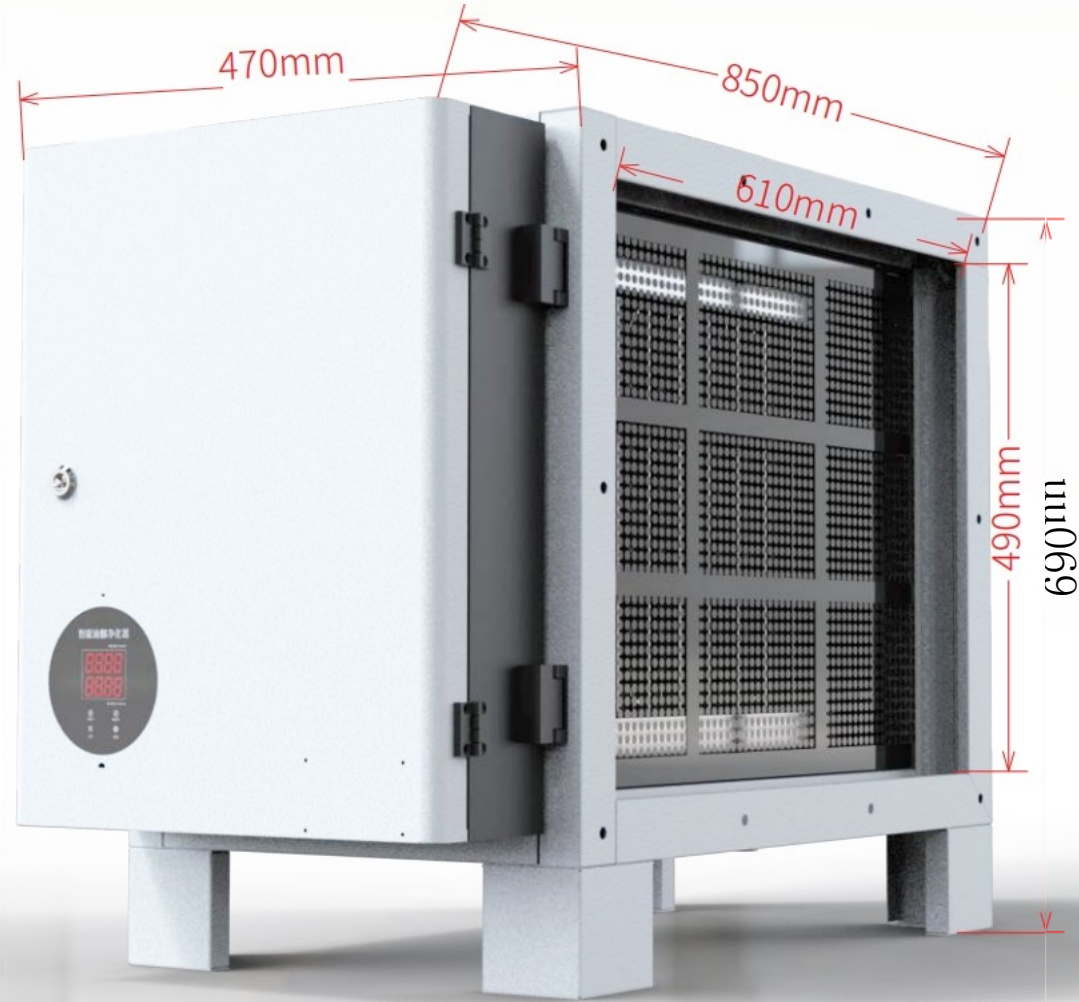

2500万


High purification efficiency; intelligent constant-voltage power supply with dual waterproof indicator lights

IP65 Waterproof

Door Opening Circuit Breaker Protection Product Liability Insurance

Electrostatic Food Fume Purifier (Jingkong Series, 4000 airflow capacity)

Product model	KL-D-J40	Air Flow Rate	4000m ³ /h	External Dimensions (L*W*H)	470*850*690 mm
Purification efficiency	95%	Aggregate capacity	300W	Flange Size (W*H)	610*490mm
Windage	107pa	Power Input	220V/50Hz	Electric Field Structure	Plate-type drawer-type electric field
Number of electric fields	1/4K	Plate spacing	7. 5mm	Shell Material	Carbon steel + automotive paint finish
Number of Power Sources	1	Headspace	≥1 meter	Electric Field Material	Stainless steel
Cleaning frequency	2–3 months	Discharge Gate	Bottom Oil Drain Valve	Maximum Import Concentration	20mg/m ³

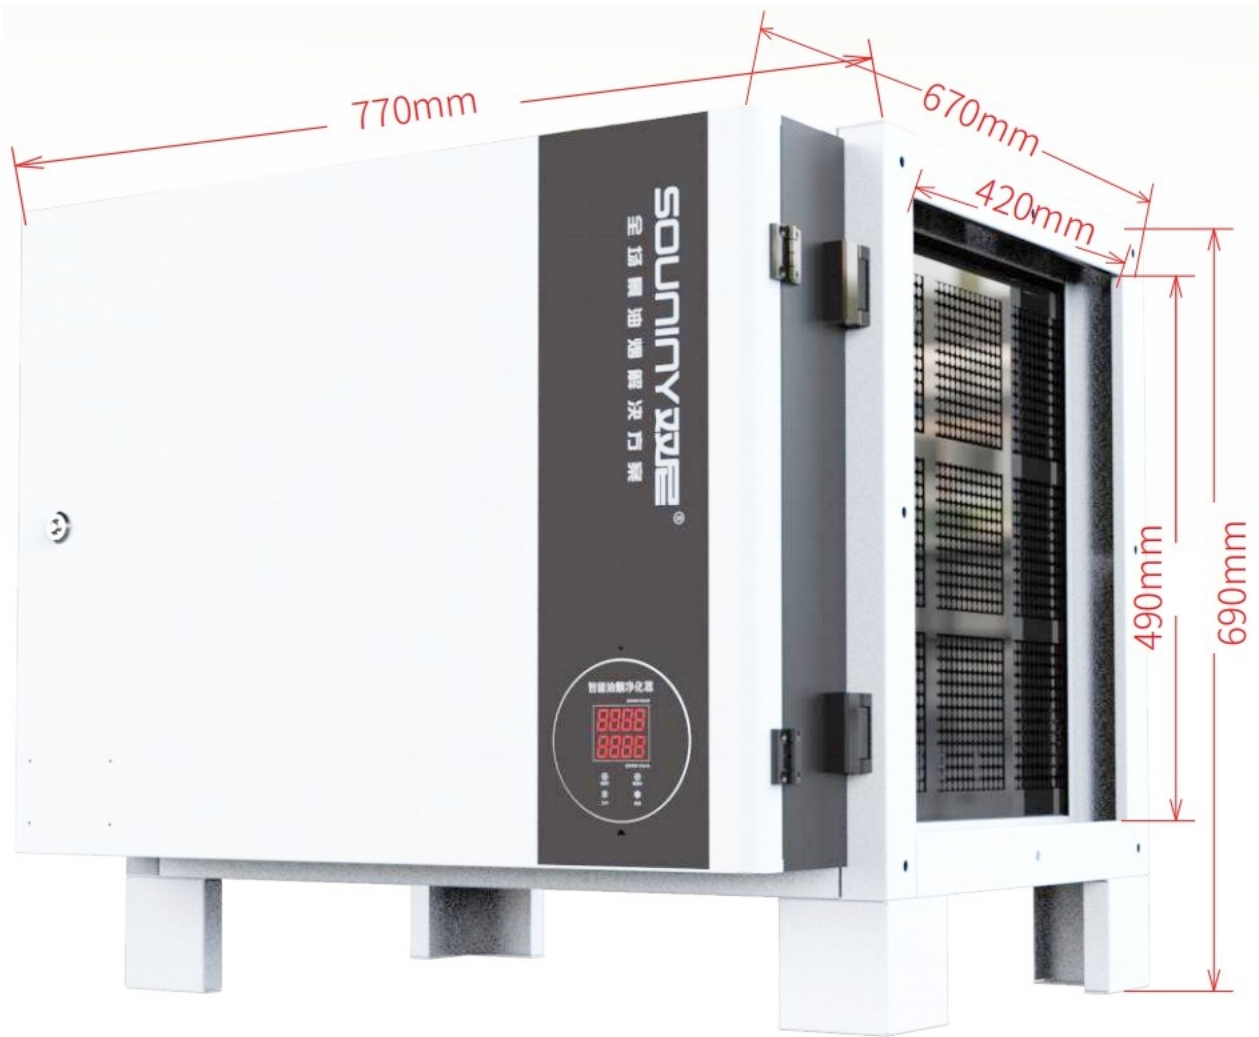


High purification efficiency; Intelligent constant-voltage power supply with dual waterproof indicators IP65 waterproof rating;Door-opening circuit-breaker protection; Product liability insurance

Electrostatic Food Fume Purifier (Jingkong Series, 6000 Airflow Capacity)

Product model	KL-D-J60	Air Flow Rate	6000m³ / h	External Dime-nsions (L*W*H)	770*670*690mm
Purification efficiency	95%	Aggregate capacity	300W	Flange Size (W*H)	420*490mm
Windage	113pa	Power Input	220V/50Hz	Electric Field Structure	Plate-type drawer-type electric field
Number of electric fields	2/3K	Plate spacing	7.5mm	Shell Material	Carbon steel + automotive paint finish
Number of Power Sources	1	Headspace	≥1 meter	Electric Field Material	Stainless steel
Cleaning frequency	2-3 months	Discharge Gate	Bottom Oil Drain Valve	Maximum Import Concentration	20mg/m³

SOUNINITY Double Ni

Full-scenario oil and smoke resolution solution

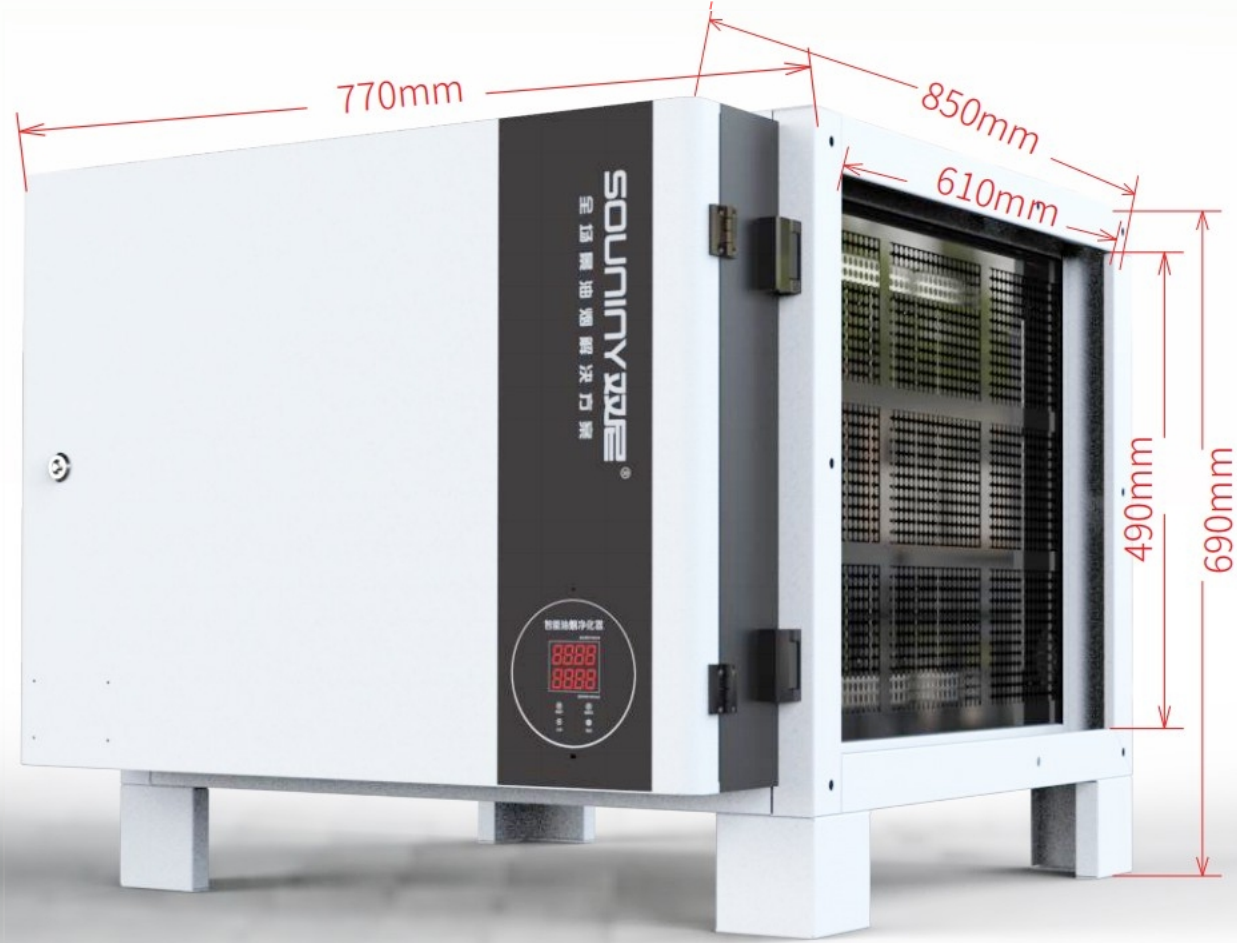

High purification efficiency; intelligent constant-voltage power supply with dual waterproof indicator lights

IP65 Waterproof

Door opening circuit breaker protection


Product Liability Insurance

Electrostatic Food Fume Purifier (Jingkong Series, Air Flow Rate: 8000 CFM)

Product model	KL-D-J80	Air Flow Rate	8000m ³ /h	External Dimensions (L*W*H)	770*856*690 mm
Purification efficiency	95%	Aggregate capacity	300W	Flange Size (W*H)	610*490mm
Windage	133pa	Power Input	220V/50Hz	Electric Field Structure	Plate-type drawer-type electric field
Number of electric fields	2/4K	Plate spacing	7. 5mm	Shell Material	Carbon steel + automotive paint finish
Number of Power Sources	1	Headspace	≥1 meter	Electric Field Material	Stainless steel
Cleaning frequency	2–3 months	Discharge Gate	Bottom Oil Drain Valve	Maximum Import Concentration	20mg/m ³

SOUNINNY Double Ni

Full-scenario oil and smoke resolution solution

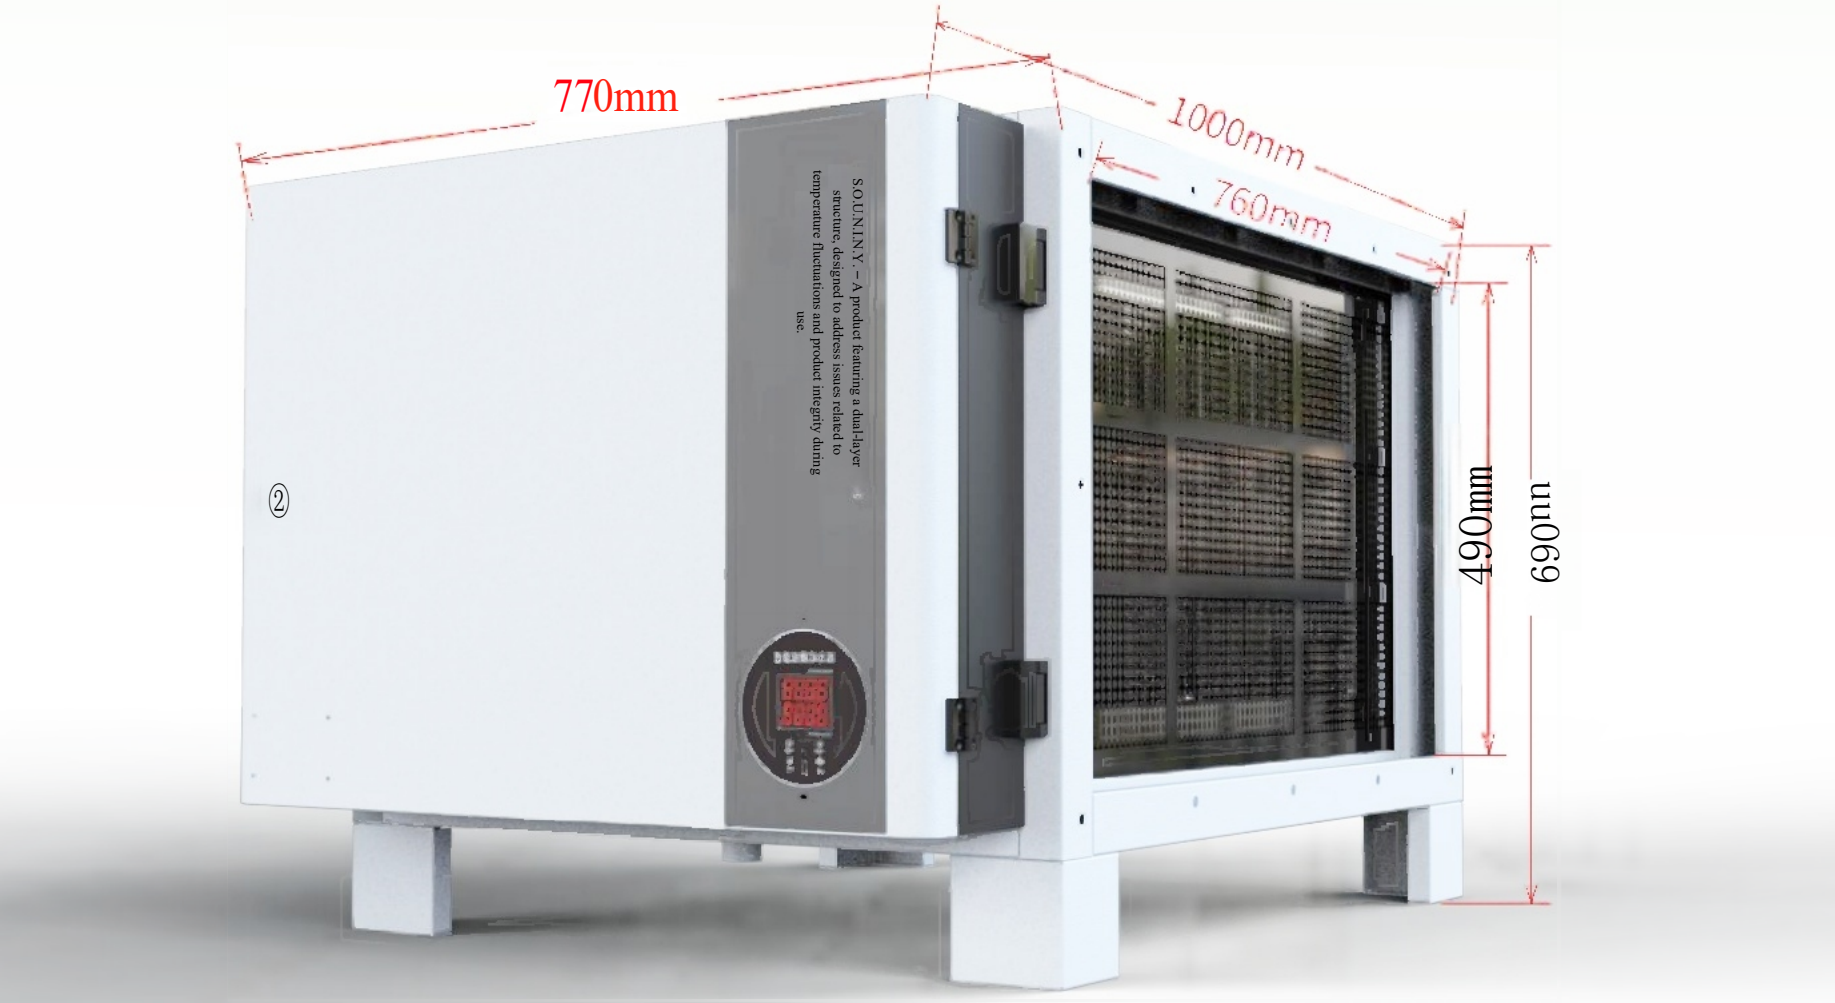

95%



2500万

High purification efficiency; intelligent constant-voltage power supply with dual waterproof indicator lights

IP65 Waterproof


Door Opening Circuit Breaker Protection Product Liability Insurance

Electrostatic Food Fume Purifier (Jingkong Series, 10,000 airflow capacity)

Product model	KL-D-J100	Air Flow Rate	10000m³ /h	External Dimensions (L*W*H)	770*1000*690 mm
Purification efficiency	95%	Aggregate capacity	600W	Flange Size (W*H)	760*490mm
Windage	124pa	Power Input	220V/50Hz	Electric Field Structure	Plate-type drawer-type electric field
Number of electric fields	2*5K	Plate spacing	7. 5mm	Shell Material	Carbon steel + automotive paint finish
Number of Power Sources	2	Headspace	≥1 meter	Electric Field Material	Stainless steel
Cleaning frequency	2–3 months	Discharge Gate	Bottom Oil Drain Valve	Maximum Import Concentration	20mg/m³

SOUNInY Double Ni

Full-scenario oil and smoke resolution solution

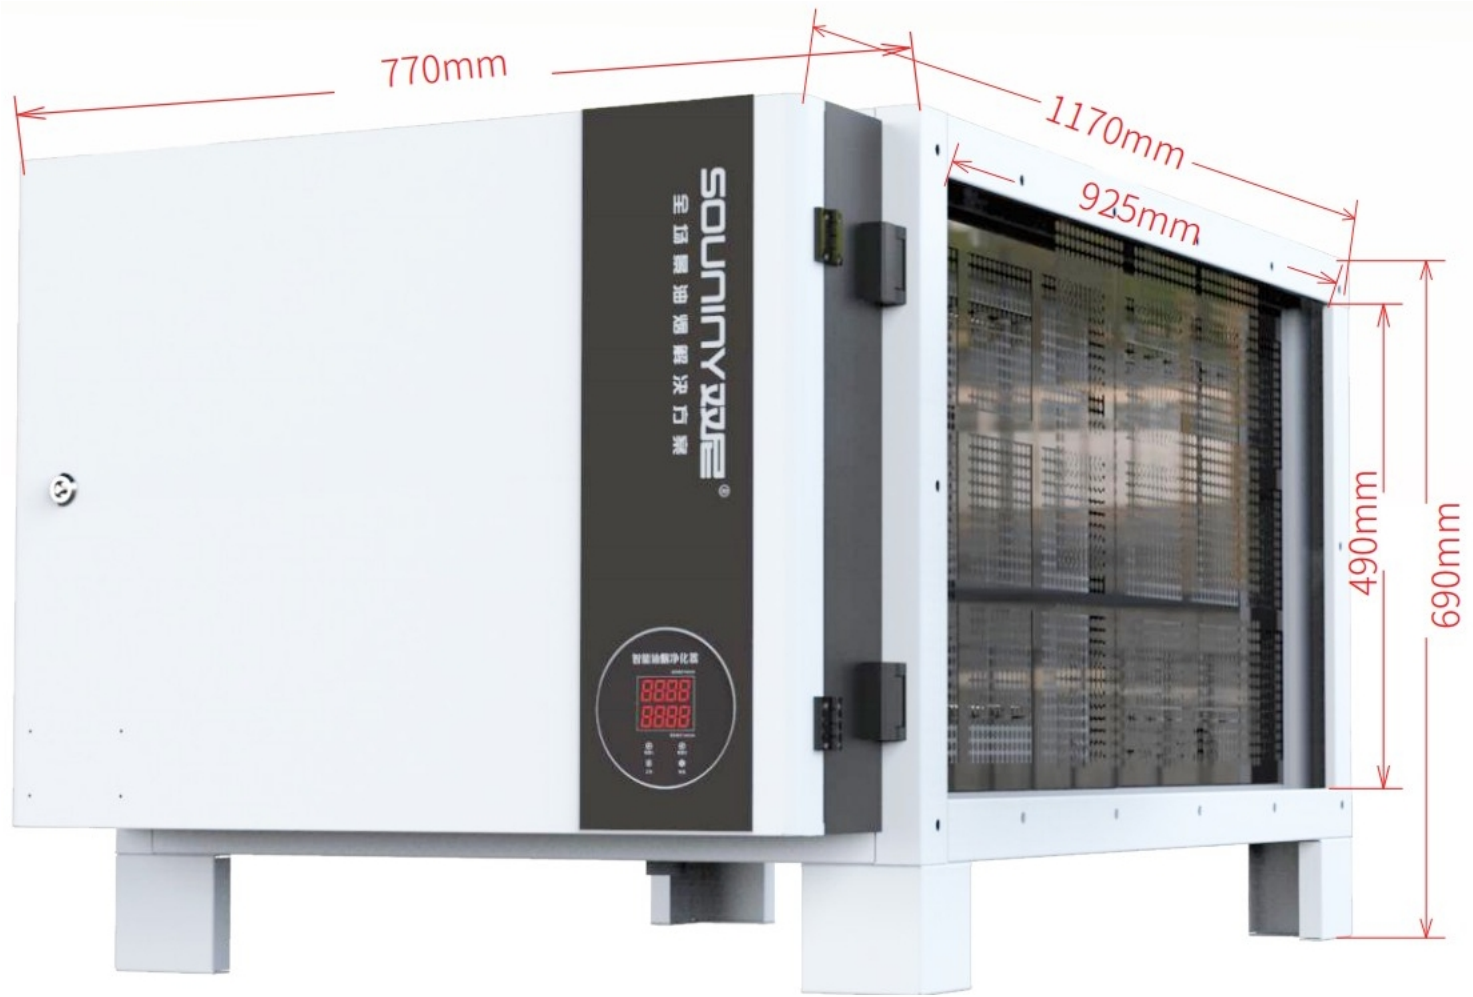

95%

2500万


High purification efficiency; Intelligent constant-voltage power supply with dual waterproof indicators IP65 waterproof rating; Door-opening circuit-breaker protection; Product liability insurance included

Electrostatic Food Fume Purifier (Jingkong Series, Air Flow Rate: 12,000 CFM)

Product model	KL-D-J120	Air Flow Rate	12000m³ /h	External Dimensions (L*W*H)	770*1170*690 mm
Purification efficiency	95%	Aggregate capacity	600W	Flange Size (W*H)	925*490mm
Windage	131pa	Power Input	220V/50Hz	Electric Field Structure	Plate-type drawer-type electric field
Number of electric fields	4/3K	Plate spacing	7. 5mm	Shell Material	Carbon steel + automotive paint finish
Number of Power Sources	2	Headspace	≥1 meter	Electric Field Material	Stainless steel
Cleaning frequency	2–3 months	Discharge Gate	Bottom Oil Drain Valve	Maximum Import Concentration	20mg/m³

SOUNiNY Double Ni

Full-scenario oil and smoke resolution solution

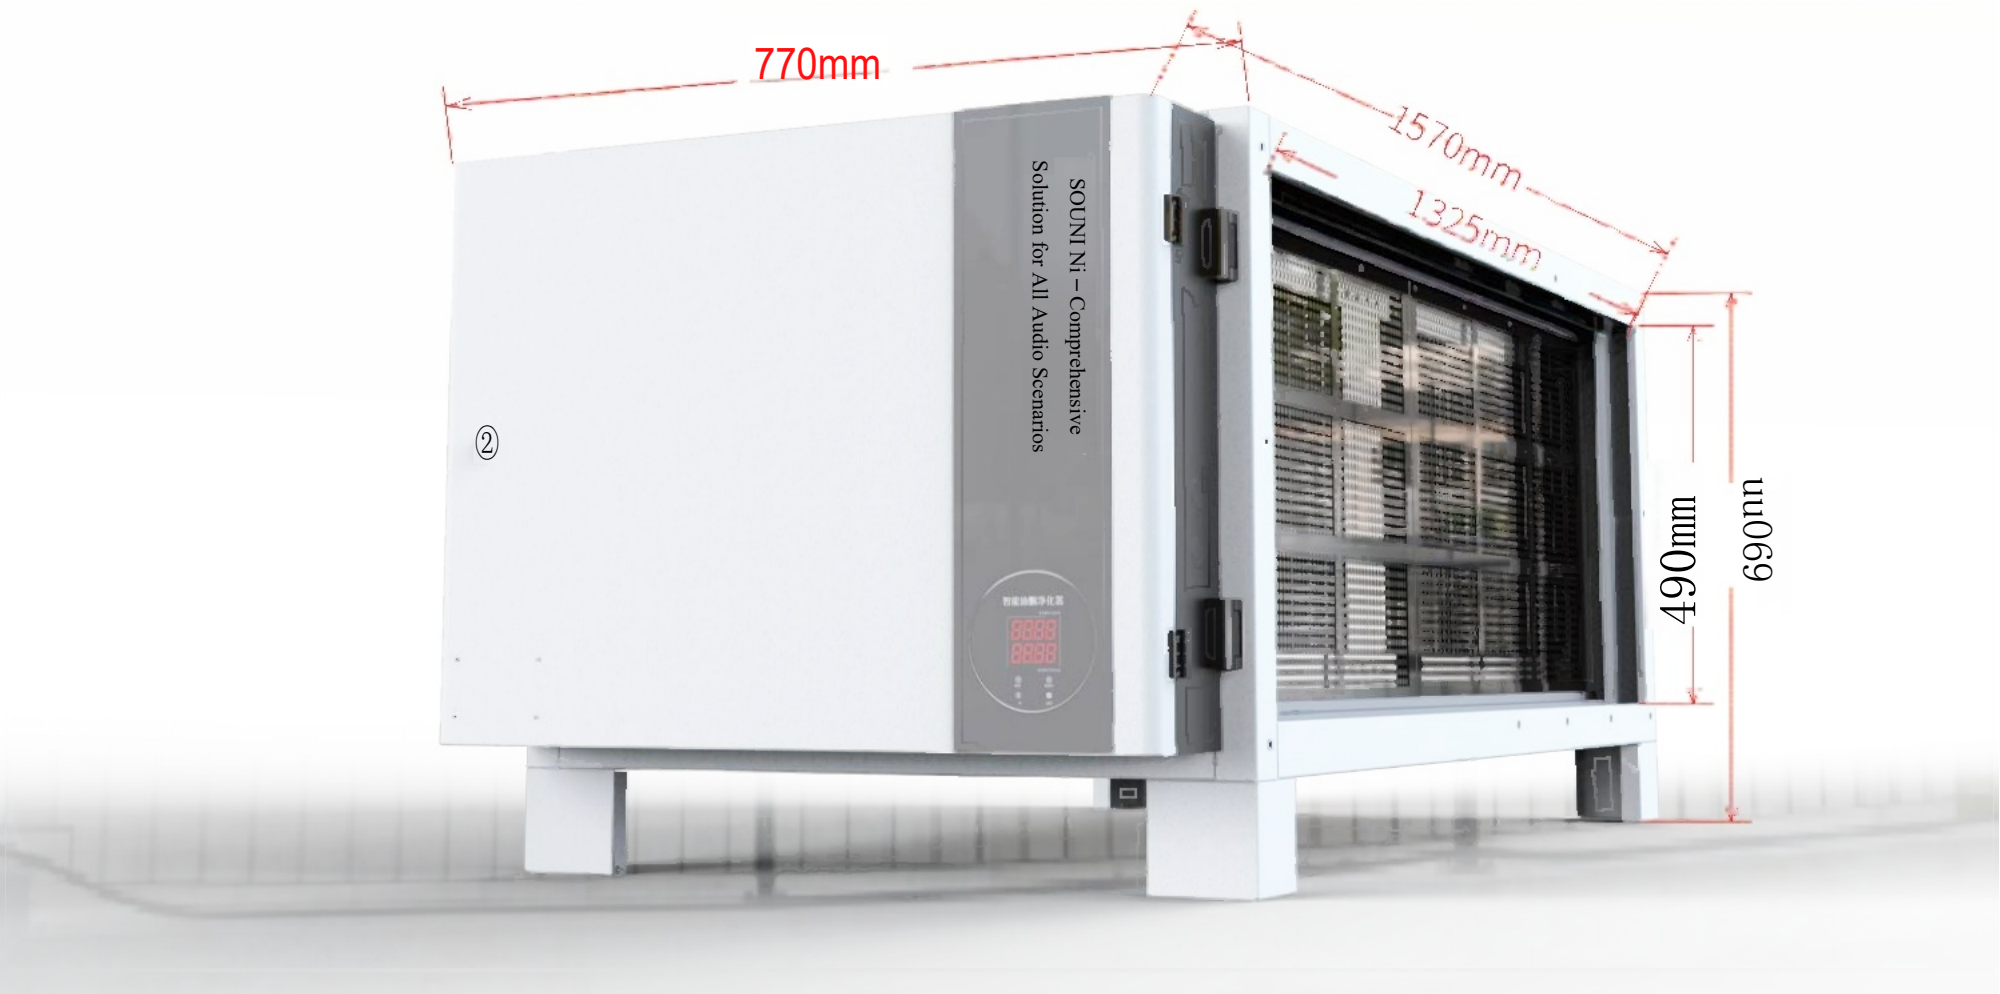

95%

2500万


High purification efficiency; Intelligent constant-voltage power supply with dual waterproof indicators IP65 waterproof rating; Door-opening circuit-breaker protection; Product liability insurance included

Electrostatic Food Fume Purifier (Jingkong Series, Single-Layer Design With a Airflow Capacity of 16,000 CFM)

Product model	KL-D-J160 Single Layer	Air Flow Rate	16000m³ /h	External Dime-nsions (L*W*H)	770*1570*690mm
Purification efficiency	95%	Aggregate capacity	600W	Flange Size (W*H)	1325*490mm
Windage	125pa	Power Input	220V/50Hz	Electric Field Structure	Plate-type drawer-type electric field
Number of electric fields	4*4K	Plate spacing	7. 5mm	Shell Material	Carbon steel + automotive paint finish
Number of Power Sources	4	Headspace	≥1 meter	Electric Field Material	Stainless steel
Cleaning frequency	180 days	Discharge Gate	Bottom Oil Drain Valve	Maximum Import Concentrat-ion	20mg/m³
Weight	170kg	Combination Description	Medium Electric Field	Maximum Export Concentrat-ion	<0. 5mg/m³

SOUNDING Double Ni

Full-scenario oil and smoke resolution solution

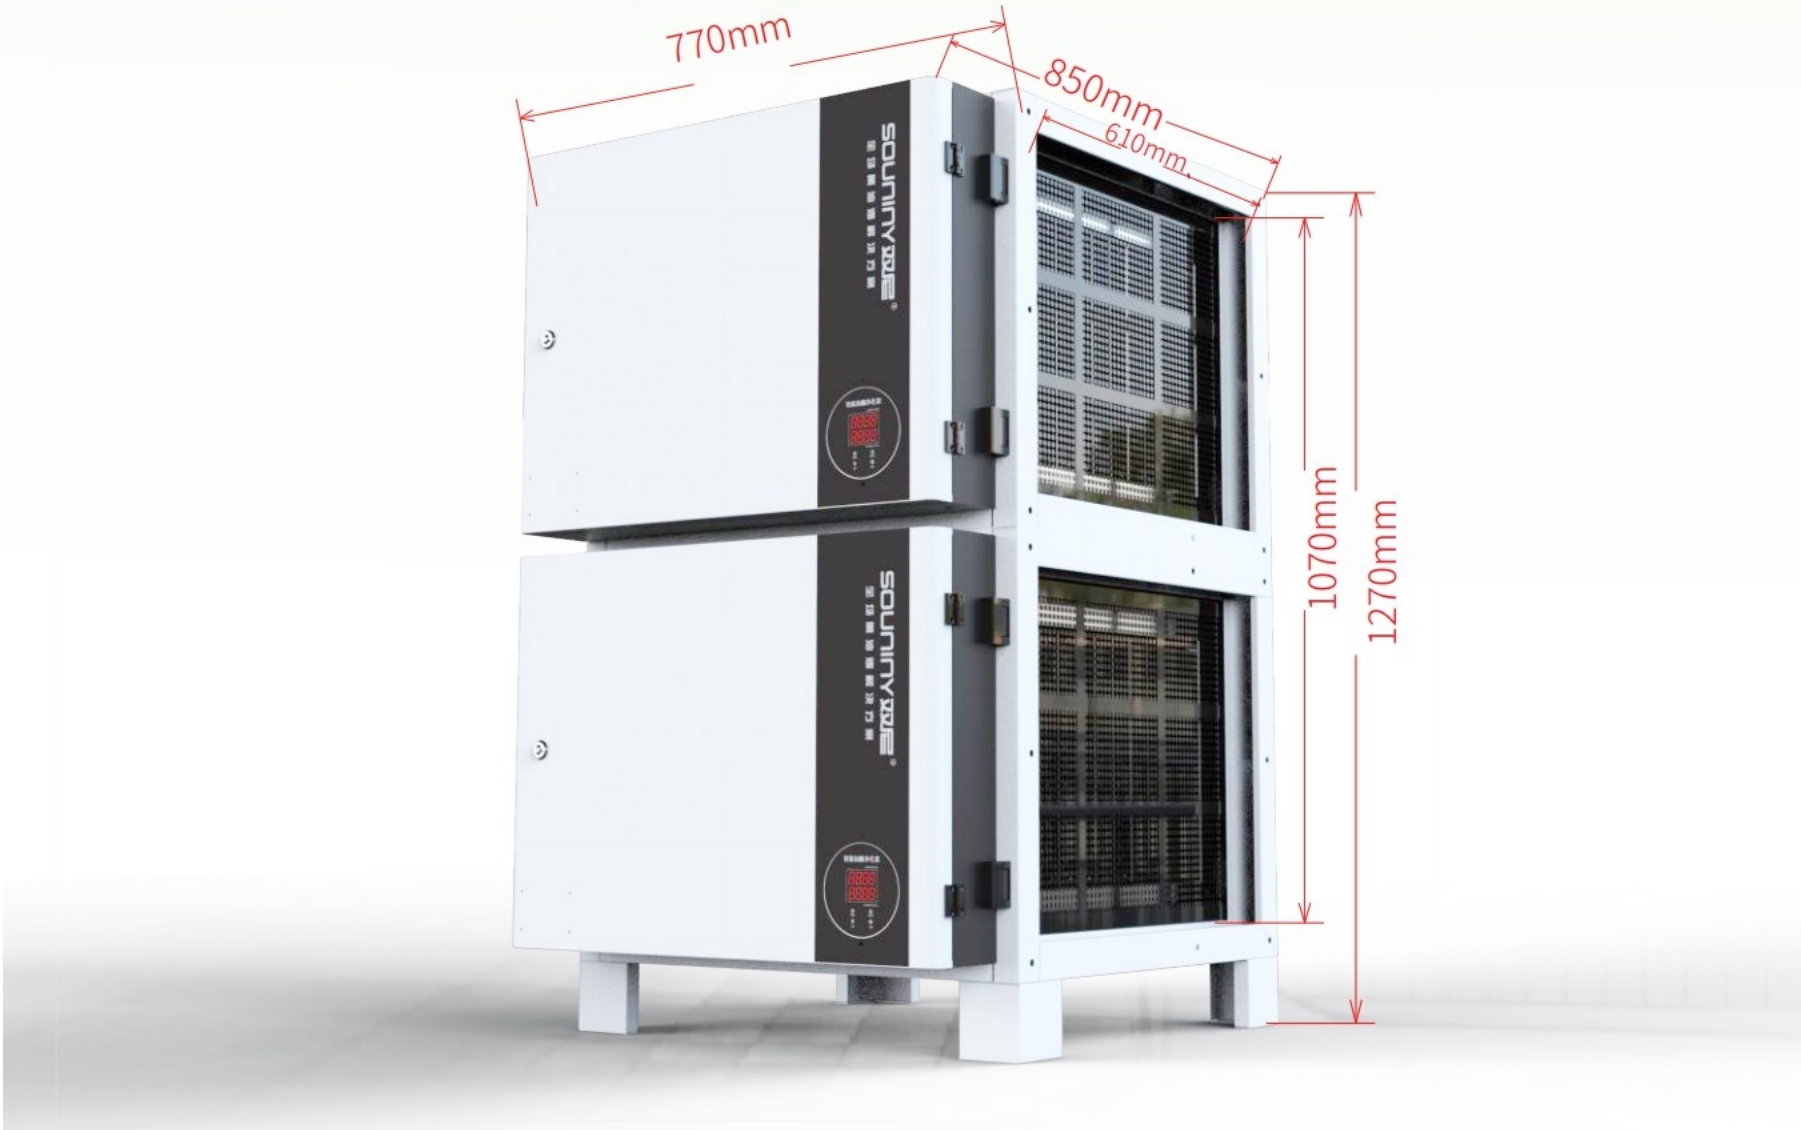

95%

High purification efficiency; intelligent constant-voltage power supply with dual waterproof indicator lights



IP65 Waterproof



Door opening circuit breaker protection

2500万

Product Liability Insurance

Electrostatic Food Fume Purifier (Jingkong Series, 16,000 CFM capacity with double-layer design)

Product model	KL-D-J160	Air Flow Rate	16000m³ /h	External Dimensions (L*W*H)	770*850*1270 mm
Purification efficiency	95%	Aggregate capacity	600W	Flange Size (W*H)	610*1070mm
Windage	125pa	Power Input	220V/50Hz	Electric Field Structure	Plate-type drawer-type electric field
Number of electric fields	4/4K	Plate spacing	7.5mm	Shell Material	Carbon steel + automotive paint finish
Number of Power Sources	2	Headspace	≥1 meter	Electric Field Material	Stainless steel
Cleaning frequency	2-3 months	Discharge Gate	Bottom Oil Drain Valve	Maximum Import Concentration	20mg/m³

SOUNINITY Double Ni

Full-scenario oil and smoke resolution solution



High purification efficiency; intelligent constant-voltage power supply with dual waterproof indicator lights



IP65 Waterproof



Door Opening Circuit Breaker Protection Product Liability Insurance




Electrostatic Food Fume Purifier (Jingkong Series, 20,000 airflow capacity)

Product model	KL-D-J200	Air Flow Rate	20000m³ /h	External Dimensions (L*W*H)	770*1000*1270 mm
Purification efficiency	95%	Aggregate capacity	1200W	Flange Size (W*H)	760*1070mm
Windage	129pa	Power Input	220V/50Hz	Electric Field Structure	Plate-type drawer-type electric field
Number of electric fields	4/5K	Plate spacing	7. 5mm	Shell Material	Carbon steel + automotive paint finish
Number of Power Sources	4	Headspace	≥1 meter	Electric Field Material	Stainless steel
Cleaning frequency	2–3 months	Discharge Gate	Bottom Oil Drain Valve	Maximum Import Concentration	20mg/m³

SOUUnInY receives E

Full-scenario oil and smoke resolution solution

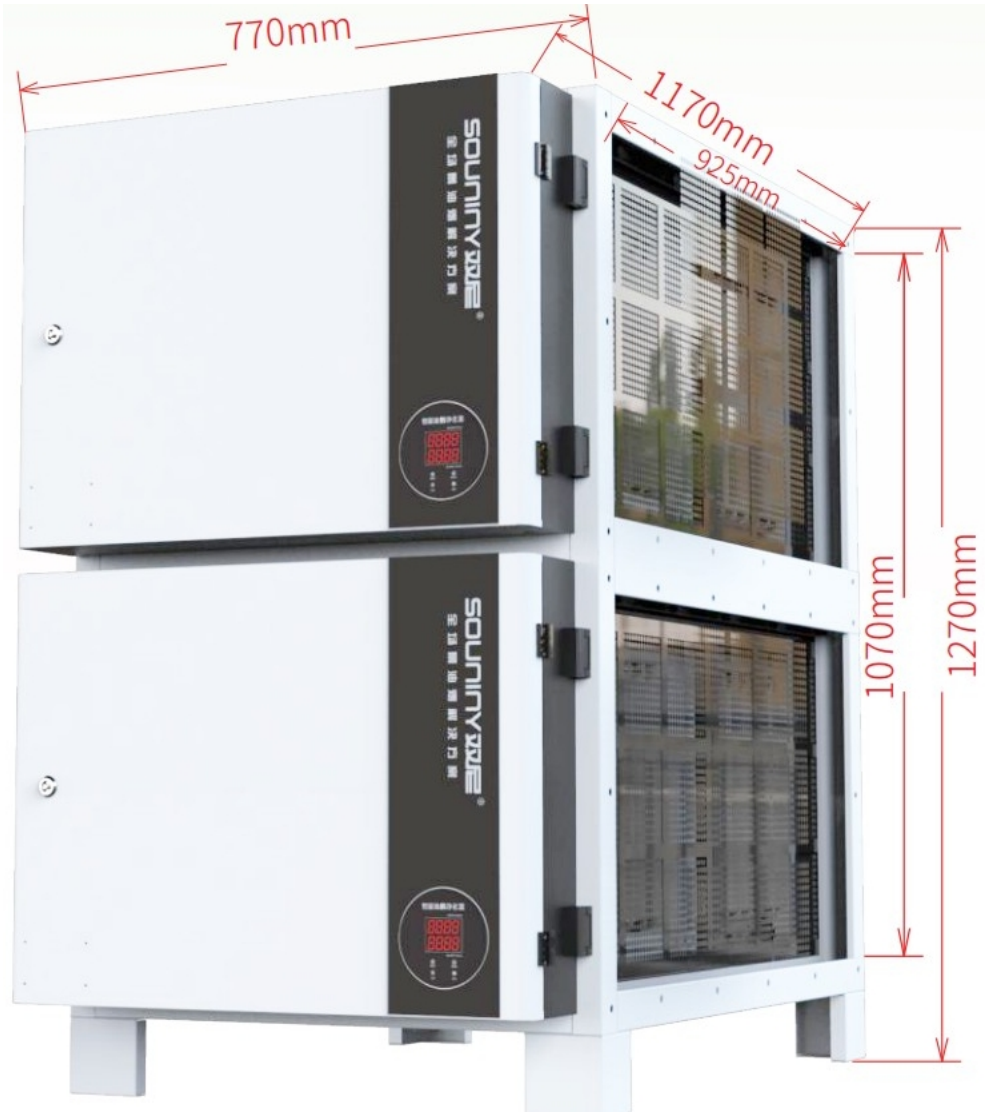

95%



2500万


High purification efficiency; Intelligent constant-voltage power supply with dual waterproof indicators IP65 waterproof rating; Door-opening circuit-breaker protection; Product liability insurance included

Electrostatic Food Fume Purifier (Jingkong Series, Air Flow Rate: 24,000 CFM)

Product model	KL-D-J240	Air Flow Rate	24000m³ /h	External Dime-nsions (L*W*H)	770*1170*1270mm
Purification efficiency	95%	Aggregate capacity	1200W	Flange Size (W*H)	925*1070mm
Windage	125pa	Power Input	220V/50Hz	Electric Field Structure	Plate-type drawer-type electric field
Number of electric fields	8/3K	Plate spacing	7.5mm	Shell Material	Carbon steel + automotive paint finish
Number of Power Sources	4	Headspace	≥1 meter	Electric Field Material	Stainless steel
Cleaning frequency	2–3 months	Discharge Gate	Bottom Oil Drain Valve	Maximum Import Concentrat-ion	20mg/m³

SOUNDITY Double Ni

Full-scenario oil and smoke resolution solution

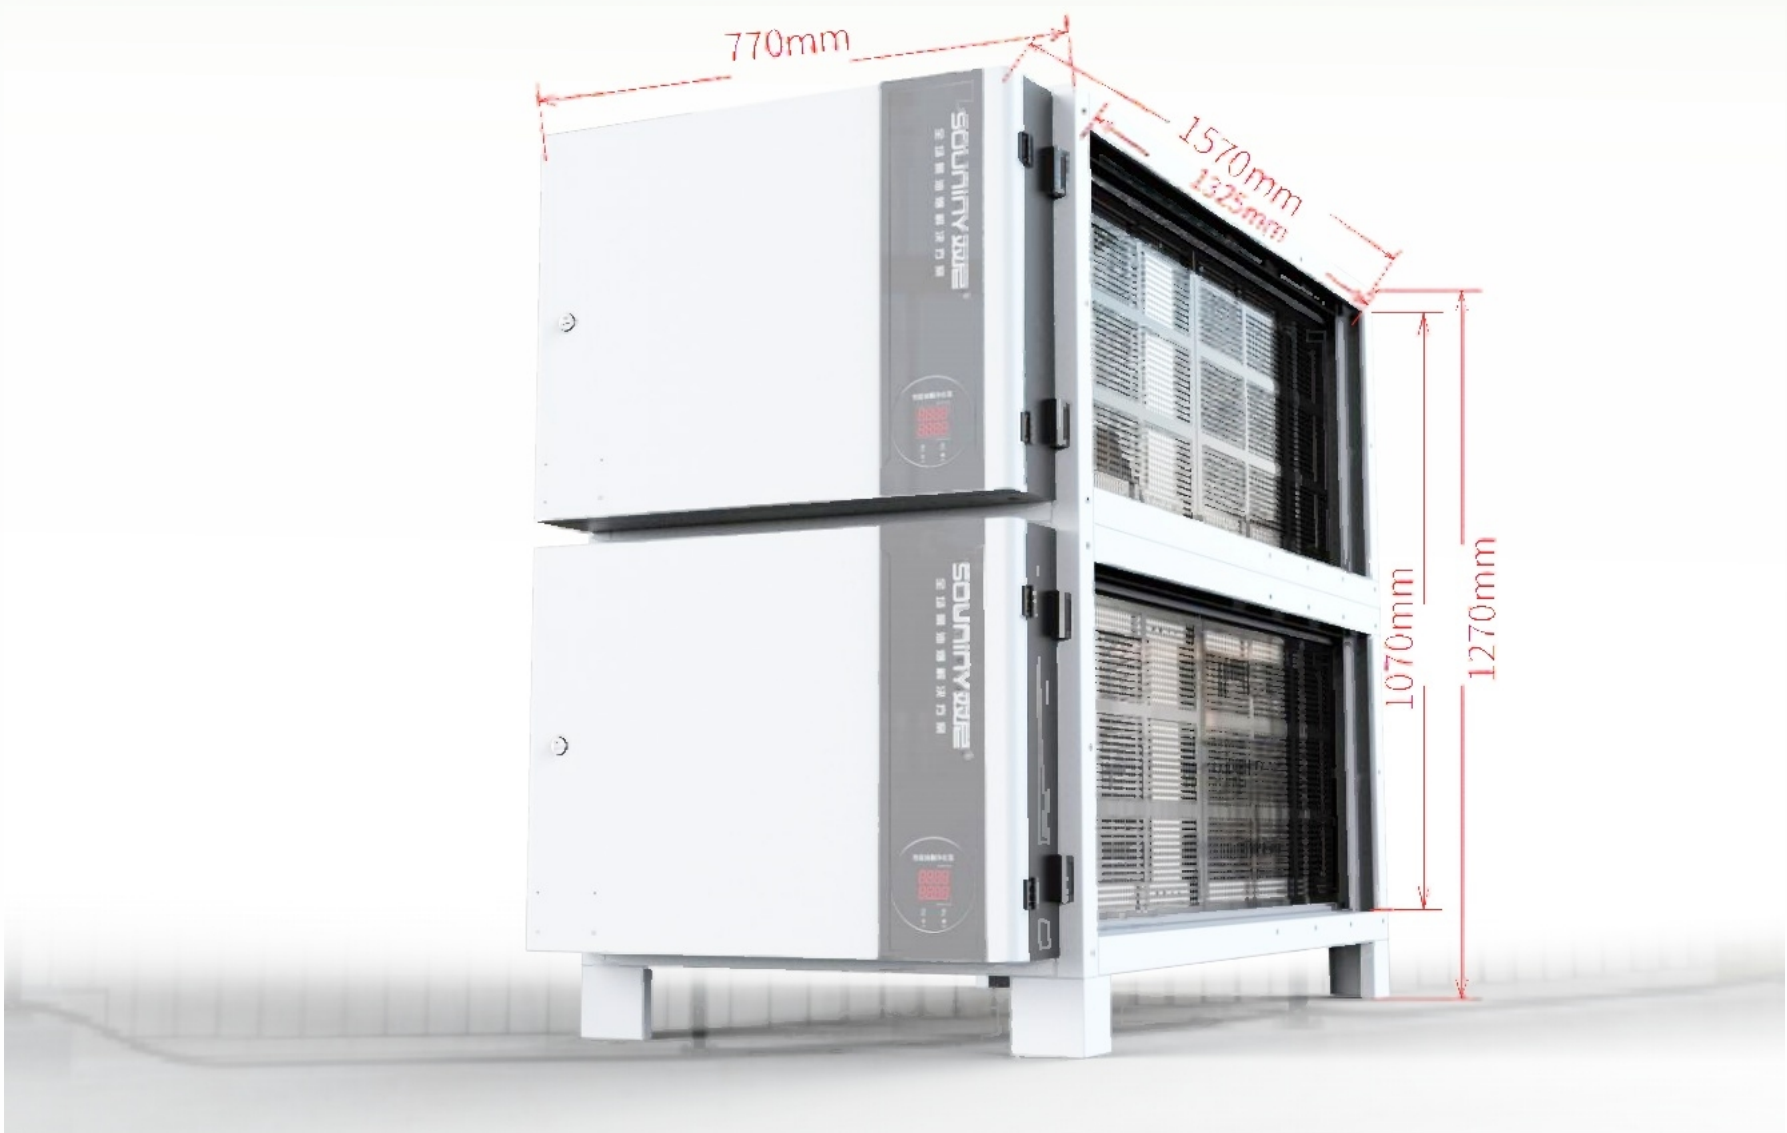

High purification efficiency; Intelligent constant-voltage power supply with dual waterproof indicator lights (IP65 rating); Door-opening circuit-breaker protection; Product liability insurance included.

Electrostatic Food Fume Purifier (Jingkong Series, Air Flow Rate: 32,000 CFM)

Product model	KL-D-J320	Air Flow Rate	32000m³ /h	External Dimensions (L*W*H)	770*1570*1270 mm
Purification efficiency	95%	Aggregate capacity	1200W	Flange Size (W*H)	1325*1070mm
Windage	121pa	Power Input	220V/50Hz	Electric Field Structure	Plate-type drawer-type electric field
Number of electric fields	8/4K	Plate spacing	7.5mm	Shell Material	Carbon steel + automotive paint finish
Number of Power Sources	4	Headspace	≥1 meter	Electric Field Material	Stainless steel
Cleaning frequency	2–3 months	Discharge Gate	Bottom Oil Drain Valve	Maximum Import Concentration	20mg/m³

SOUNITY Double Ni

Full-scenario oil and smoke resolution solution



95%



2500万

High purification efficiency; intelligent constant-voltage power supply with dual waterproof indicator lights

IP65 Waterproof

Door opening circuit breaker protection

Product Liability Insurance

Electrostatic Food Fume Purifier (Jingkong Series, 40,000 airflow capacity)

Product model	KL-D-J400	Air Flow Rate	40000m³ /h	External Dimensions (L*W*H)	1540*1000*1270 mm
Purification efficiency	95%	Aggregate capacity	2400W	Flange Size (W*H)	760*1070mm
Windage	153pa	Power Input	220V/50Hz	Electric Field Structure	Plate-type drawer-type electric field
Number of electric fields	8/5K	Plate spacing	7. 5mm	Shell Material	Carbon steel + automotive paint finish
Number of Power Sources	8	Headspace	≥1 meter	Electric Field Material	Stainless steel
Cleaning frequency	2–3 months	Discharge Gate	Bottom Oil Drain Valve	Maximum Import Concentration	20mg/m³

SOUNITY Double Ni

Full-scenario oil and smoke resolution solution



95%

High purification efficiency; intelligent constant-voltage power supply with dual waterproof indicator lights



IP65 Waterproof



Door Opening Circuit Breaker Protection Product Liability Insurance


2500万

Electrostatic Food Fume Purifier (Jingkong Series, 48,000 CFM Capacity With Double-Layer Design)

Product model	KL-D-J480 Double-layer	Air Flow Rate	48000m ³ /h	External Dimensions (L*W*H)	1540*1170*1270 mm
Purification efficiency	95%	Aggregate capacity	2400w	Flange Size (W*H)	925*1070mm
Windage	173pa	Power Input	220V/50Hz	Electric Field Structure	Plate-type drawer-type electric field
Number of electric fields	12/4K	Plate spacing	7. 5mm	Shell Material	Carbon steel + automotive paint finish
Number of Power Sources	12	Headspace	≥1 meter	Electric Field Material	Stainless steel
Cleaning frequency	180 days	Discharge Gate	Bottom Oil Drain Valve	Maximum Import Concentration	20mg/m ³
Weight	490kg	Combination Description	Medium Electric Field	Maximum Export Concentration	<0. 5mg/m ³

SOUNOON Double Ni

Full-scenario oil and smoke resolution solution

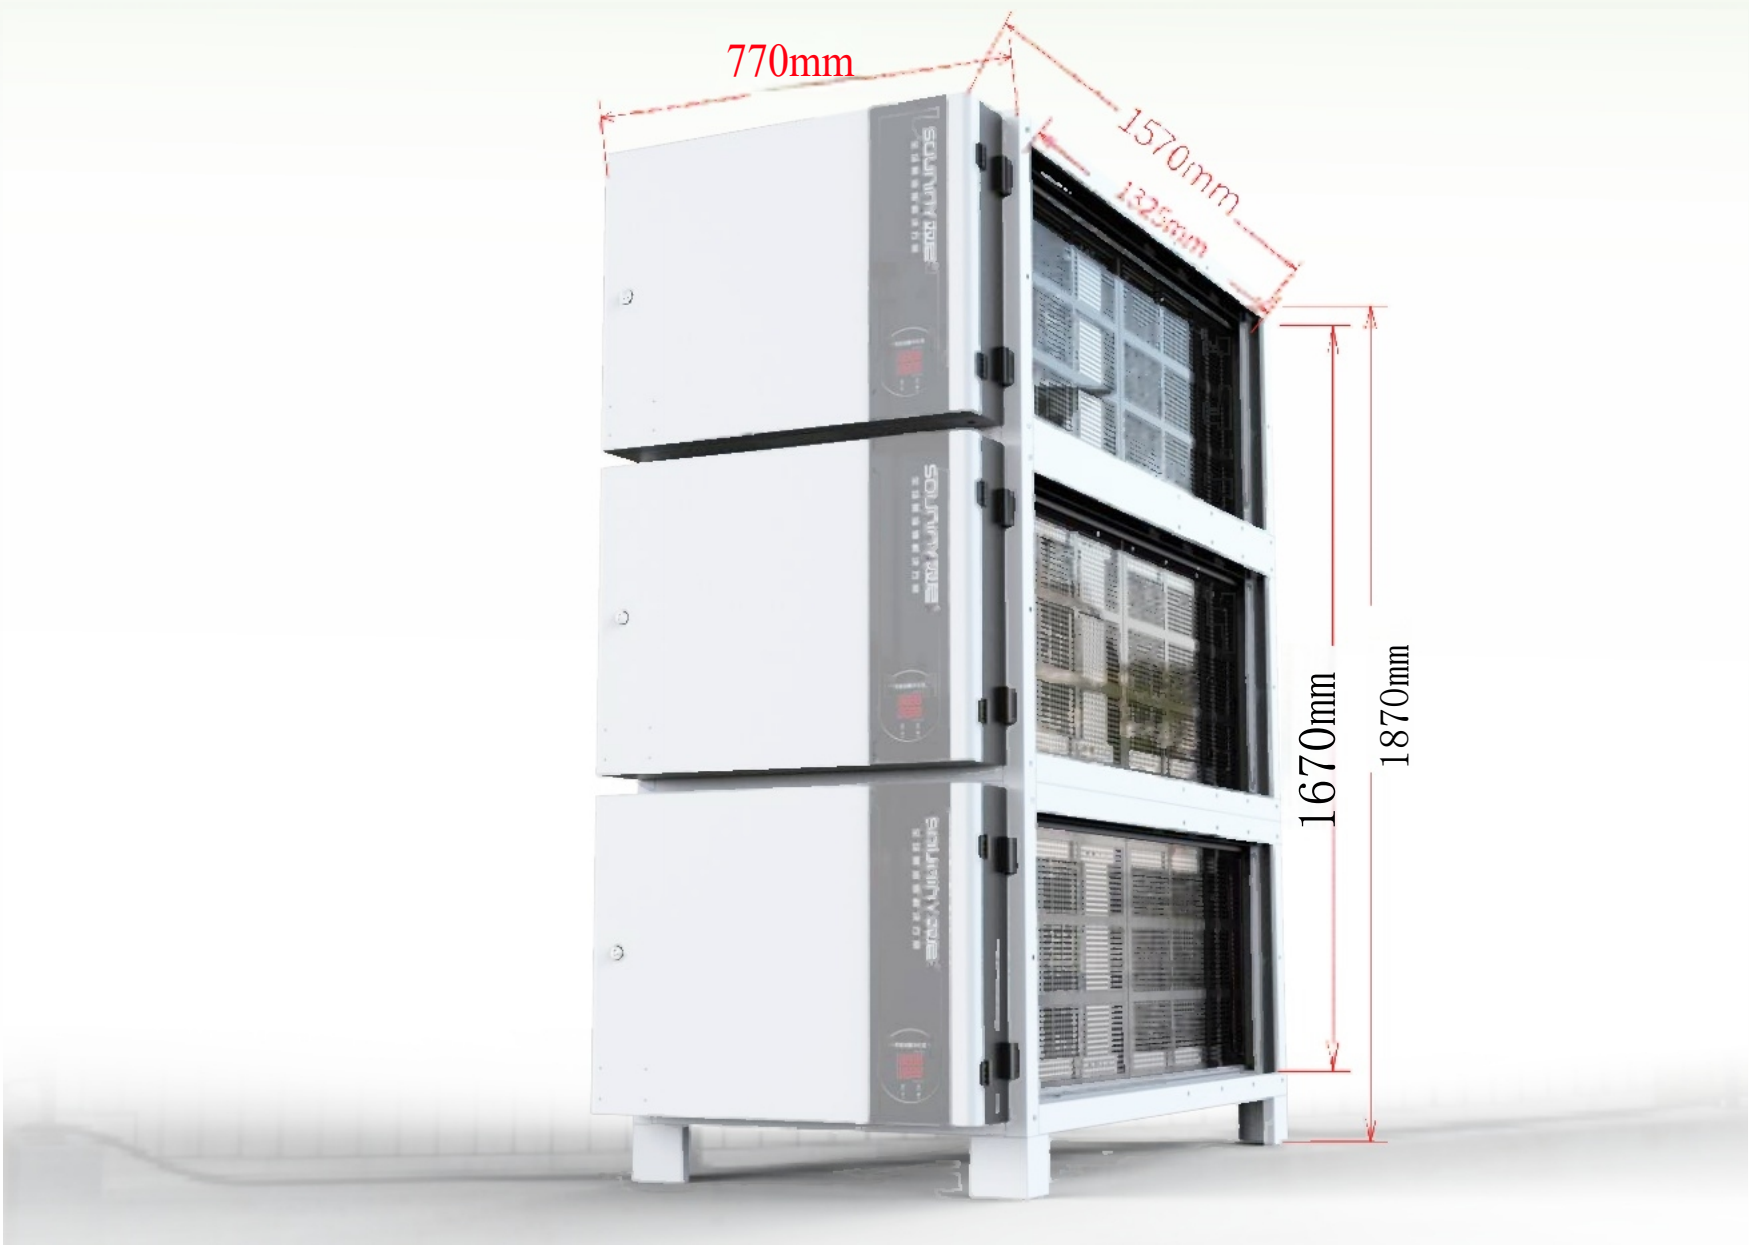

High purification efficiency; intelligent constant-voltage power supply with dual waterproof indicator lights

IP65 Waterproof


Door Opening Circuit Breaker Protection Product Liability Insurance

Electrostatic Food Fume Purifier (Jingkong Series, 48,000 CFM Capacity, Three-Stage Design)

Product model	KL-D-J480 Three-layer Structure	Air Flow Rate	48000m³ /h	External Dimensions (L*W*H)	770*1570*1870 mm
Purification efficiency	95%	Aggregate capacity	1800w	Flange Size (W*H)	1325*1670mm
Windage	152pa	Power Input	220V/50Hz	Electric Field Structure	Plate-type drawer-type electric field
Number of electric fields	12/4K	Plate spacing	7. 5mm	Shell Material	Carbon steel + automotive paint finish
Number of Power Sources	12	Headspace	≥1 meter	Electric Field Material	Stainless steel
Cleaning frequency	180 days	Discharge Gate	Bottom Oil Drain Valve	Maximum Import Concentration	20mg/m³
Weight	490kg	Combination Description	Medium Electric Field	Maximum Export Concentration	<0. 5mg/m³

SOUNDITY Double Ni

Full-scenario oil and smoke resolution solution

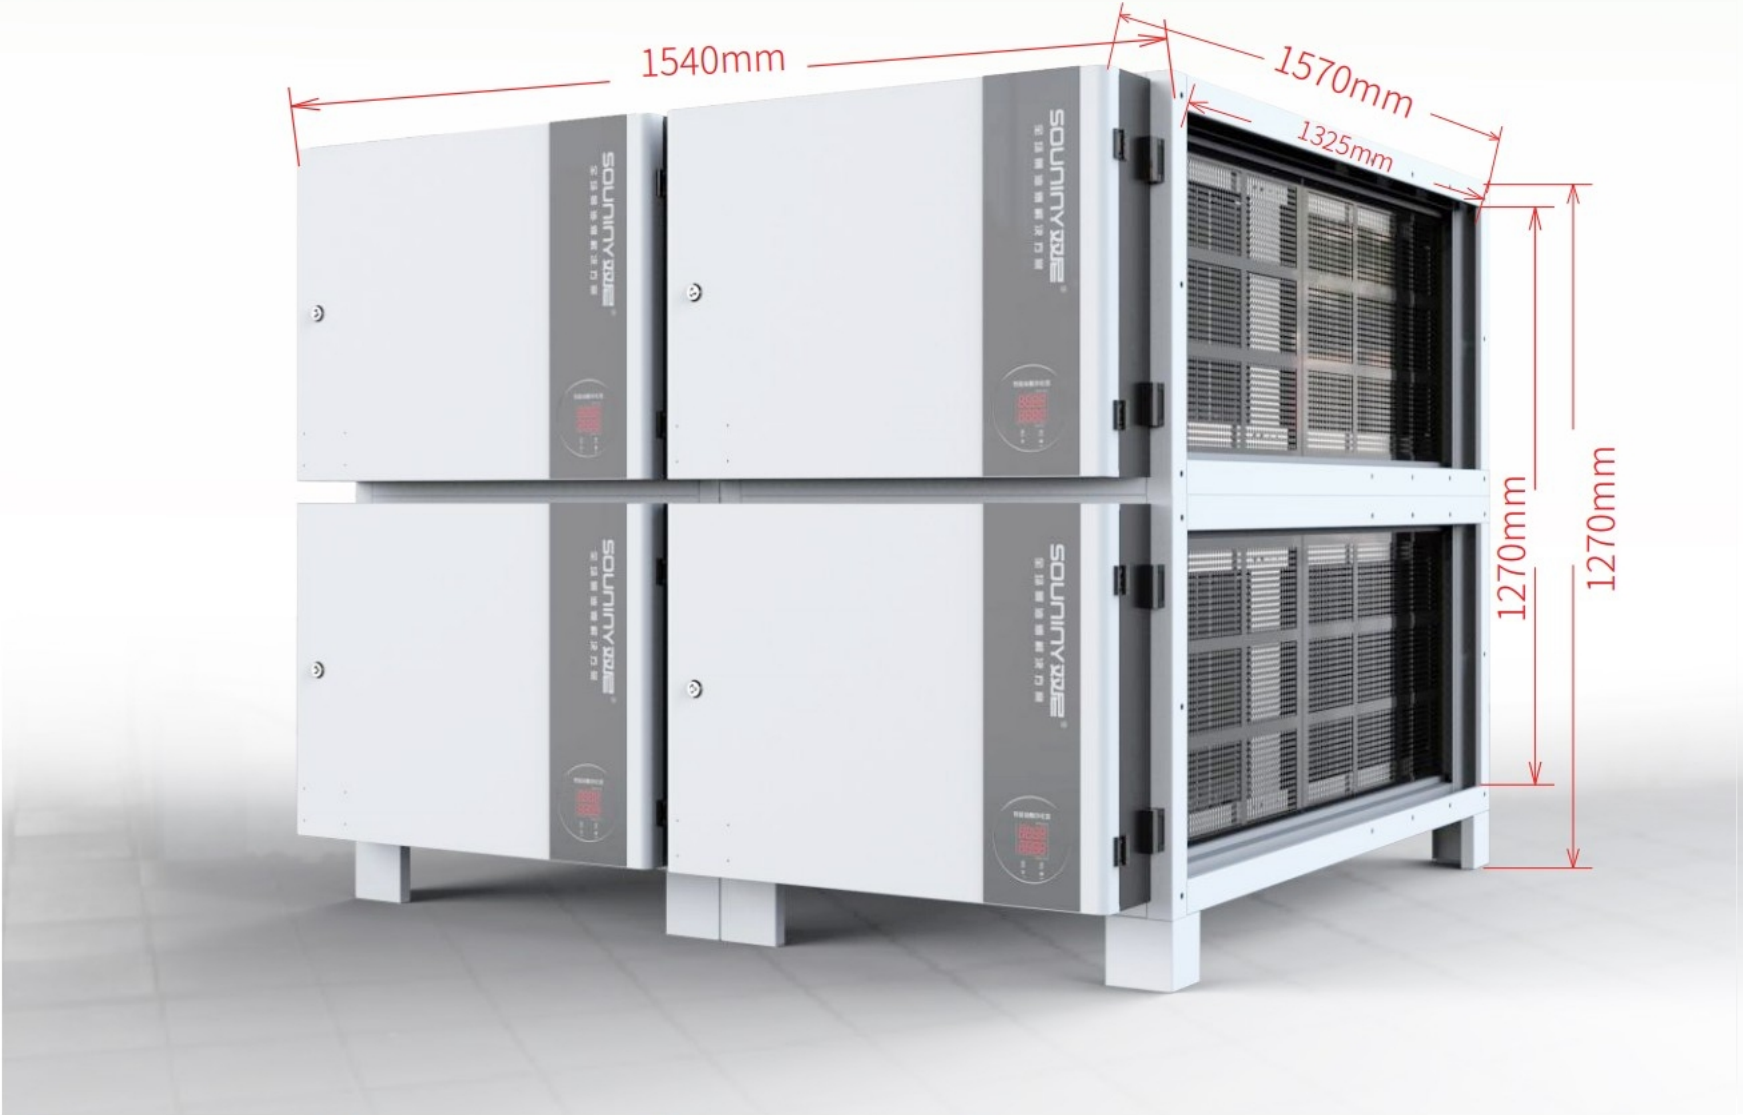

High purification efficiency; intelligent constant-voltage power supply with dual waterproof indicator lights

IP65 Waterproof

Door Opening Circuit Breaker Protection Product Liability Insurance



Electrostatic Food Fume Purifier (Jingkong Series, Air Flow Rate: 64,000 CFM)

Product model	KL-D-J640	Air Flow Rate	64000m³ /h	External Dimensions (L*W*H)	1540*1570*1270 mm
Purification efficiency	95%	Aggregate capacity	2400w	Flange Size (W*H)	1325*1070mm
Windage	176pa	Power Input	220V/50Hz	Electric Field Structure	Plate-type drawer-type electric field
Number of electric fields	16/4K	Plate spacing	7. 5mm	Shell Material	Carbon steel + automotive paint finish
Number of Power Sources	8	Headspace	≥1 meter	Electric Field Material	Stainless steel
Cleaning frequency	2-3 months	Discharge Gate	Bottom Oil Drain Valve	Maximum Import Concentration	20mg/m³